




Snow Melting Heating Cable

Description

Snow melting heating cable is an ideal solution to automatically prevent snow and ice build-up in winter. It's eco-friendly and highly efficient compared with conventional snow removal methods that often cause damage. It has good flexibility, can be shaped and used in combinations of different sizes. Output is 33w per linear meter. The closer you place the wire, the higher the output per square feet. Its proficient perfor-mance allows the heated surfaces to be free of snow and ice. Available for both concrete and asphalt applications.

Cable Construction

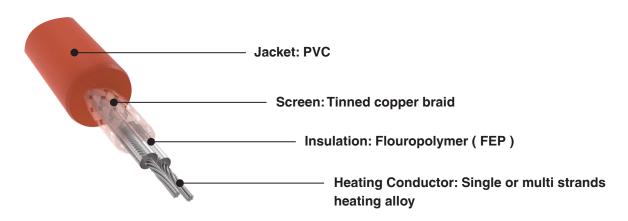

Features

- Free form cable allows for full coverage of any ground especially those with curves and angles.
- Flexible cable to cable spacing for easy adjusting the power outputs per square feet.
- · Toughest wire
- · Can be used under asphalt, concrete, or pavers
- Easy installation
- Safe and durable

Performance

- Apply Voltage: 230V
- Linear Output: 33 W/m (other output wattage also available by request)
- · Cable Construction: Multi-strand conductor, twin cores
- Cable Diameter: 4-6 mm
- Cold Lead Length: 6 m

Ordering information

Model Number	Cable Length	Total Power	Total Current
	(m)	(W)	(A)
SHC033ME3-0011	11	363	1.6
SHC033ME3-0015	15	495	2.2
SHC033ME3-0020	20	660	2.9
SHC033ME3-0026	27	891	3.9
SHC033ME3-0034	34	1122	4.9
SHC033ME3-0042	42	1386	6
SHC033ME3-0053	53	1749	7.6
SHC033ME3-0067	68	2244	9.8
SHC033ME3-0080	80	2640	11.5
SHC033ME3-0093	93	3069	13.3
SHC033ME3-0106	106	3498	15.2
SHC033ME3-0120	120	3960	17.2
SHC033ME3-0133	133	4387	19.1
SHC033ME3-0146	146	4818	21
SHC033ME3-0160	160	5280	23

Further Information

Please consult the appropriate termination instructions and the E-POLY Installation, Testing and Maintenance Manual for further details.

